

USER INSTRUCTIONS

DUAL POWER PAK

MODEL No 346
(28 - 30 & 50 mBar)



LIVE THE BRAAI LIFE



503-0386 LEV9

CAUTION

When using this appliance with a cooking device, provide ample ventilation. Gas appliances consumes air (oxygen). Do not use this appliance in an unventilated space to avoid endangering your life. If still more gas appliances and/or occupants using gas are added to the space, additional ventilation must be provided. **FOR OUTDOOR USE ONLY**

IMPORTANT

Read these instructions carefully so as to familiarize yourself with the appliance before use.
Retain these instructions for future reference.




GB

1. Introduction

- The purpose of this appliance is to be a light weight, compact power source for CADAC camping products when the user does not want to use a large LPG cylinder. The user simply connects two gas cartridges to the Dual Power Pak and then to a Grillogas / Skottel / Carri Chef 2, or another compatible unit.
- This regulator complies with EN 12864:2001 / A1:2003 / A2:2005.
- Appliance category: J3B(28-30mbar): All EU and NO, IS,CH,TR
- Appliance category: J3B(50mbar): DE,AT,LU
- Only to be used with EN417 type disposable cartridges(CADAC CA445,CA500). The gas cartridges must always be in the upright position.
- The gas cartridge/refillable cylinder is to be used only in the upright position.
- Gas appliances require ventilation for efficient performance and to ensure the safety of users and other persons in close proximity.
- The Power Pak is fitted with a regulator with a maximum supply rate of 0.8Kg/hour.
- The user may adjust the supply rate of the Power Pak unit by turning the control valve on the Power Pak from fully closed to fully open.
- Use Outdoors Only.

2. Safety Information

- The Power Pak is guaranteed for a period of 2 years against factory faults. Natural wear and tear, valve components and plastic parts are excluded. The same applies to damage caused by improper handling, misuse or repair by an unauthorized LP Gas Dealer. Liability is limited to replacement to the replacement of products. Never use in an unventilated room with all windows and doors closed.
- Never place the Power Pak on a stove, and always keep it at least 1 meter away from any source of heat, and ensure it is not placed in an environment where the temperature will exceed 50°C.
- Always store, transport or use the Power Pak in an upright position.
- When not in use, keep the valve closed, even if it is empty.
- Check that the seals(Fig. 1) are in place and in good condition before connecting the gas container to the appliance. Do not use the appliance if it has a damaged or worn seal. If in doubt, replace the seal before use.
- Do not use an appliance which is leaking, damaged or which does not operate properly (malfunctioning).
- If you suspect a gas leak, soapy water must be applied to the joints (the appliance must not be fully immersed in soapy water as this may result in an unsafe operation of the appliance). Any leakage will be seen as bubbles coming from the leakage point. If you cannot remedy any leakage, unscrew the gas cartridge from the appliance and return the appliance to your stockist.
- The appliance should only be used in a well-ventilated location (minimum ventilation requirement 5m³/h) in order to satisfy official ventilation standards for the supply of sufficient combustion air and to avoid the dangerous building up of unburned gases.
- Gas cartridges must be fitted or changed in a well-ventilated location, preferably outside and away from any sources of ignition, such as naked flames, pilots, electric fires and away from other people.
- Never leave the appliance unattended when in use.
- Do not modify the appliance. Do not use it for anything for which it has not been designed.
- In normal conditions of use, in order to ensure the correct operation of the Power Pak, it is recommended that this regulator is changed within 10 years of the date of manufacture.
- Do not move the Power Pak during operation.
- Do not use the Power Pak in small enclosed spaces without ventilation.
- For outdoor use only.

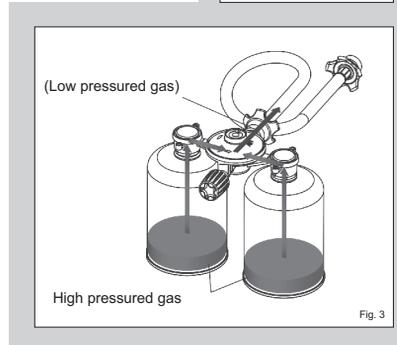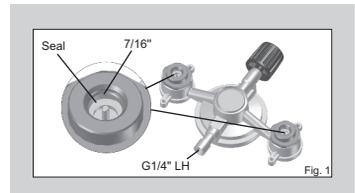

3. Operation of the Power Pak

- Before operating the appliance, ensure all seals are in good condition. If you are unsure, replace the seals.
- Ensure that the hose is connected securely to the valve outlet of the Power Pak using the supplied spanner to tighten.
- Connect the other end of the hose securely to the appliance you wish to operate, using the supplied spanner to tighten.
- First ensure the control knob on the appliance you are going to operate is in the "off" position.
- Insert the two gas cartridges onto the unit by screwing them in place (Fig.4).
- Turn the control knob on the Power Pak anti-clockwise to increase the gas flow (Fig. 2).
- Then turn on the appliance you wish to operate, and light the appliance.
- Adjust the control knob, to reach the desired level gas flow to the appliance.
- Heat control to be done using the appliance control knob

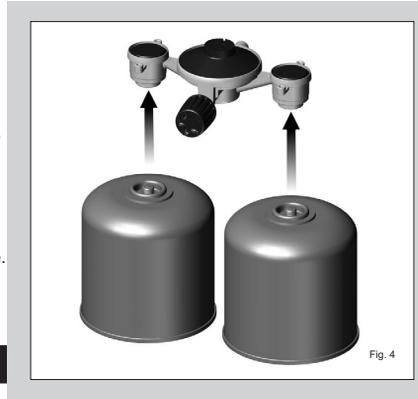


Fig. 4

4. To disassemble the unit

- Close the control knob.
- Remove the cartridge by unscrewing it.
- Disconnect the hose from the appliance and pack the unit away for storage.
- Cartridges should always be stored in a cool, dry, well-ventilated area.

5. Checking for leaks (Gas cartridge)

- To check the gas cartridge for leaks, apply soapy water to the connection area of the gas cartridge and see if any bubbles are visible. Any leakage will be seen as bubbles coming from the leakage point. If you cannot remedy any leakage, return the cartridge to your stockist.